
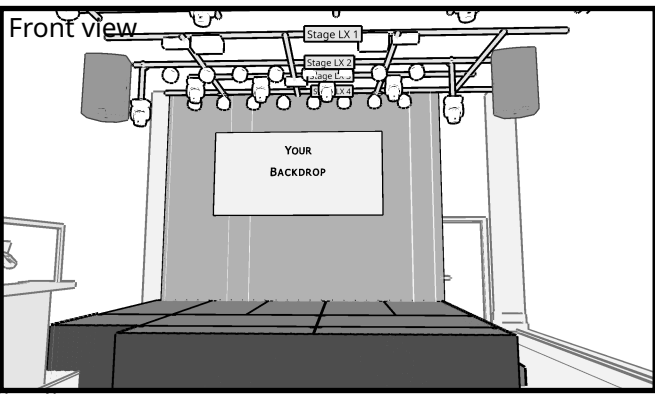


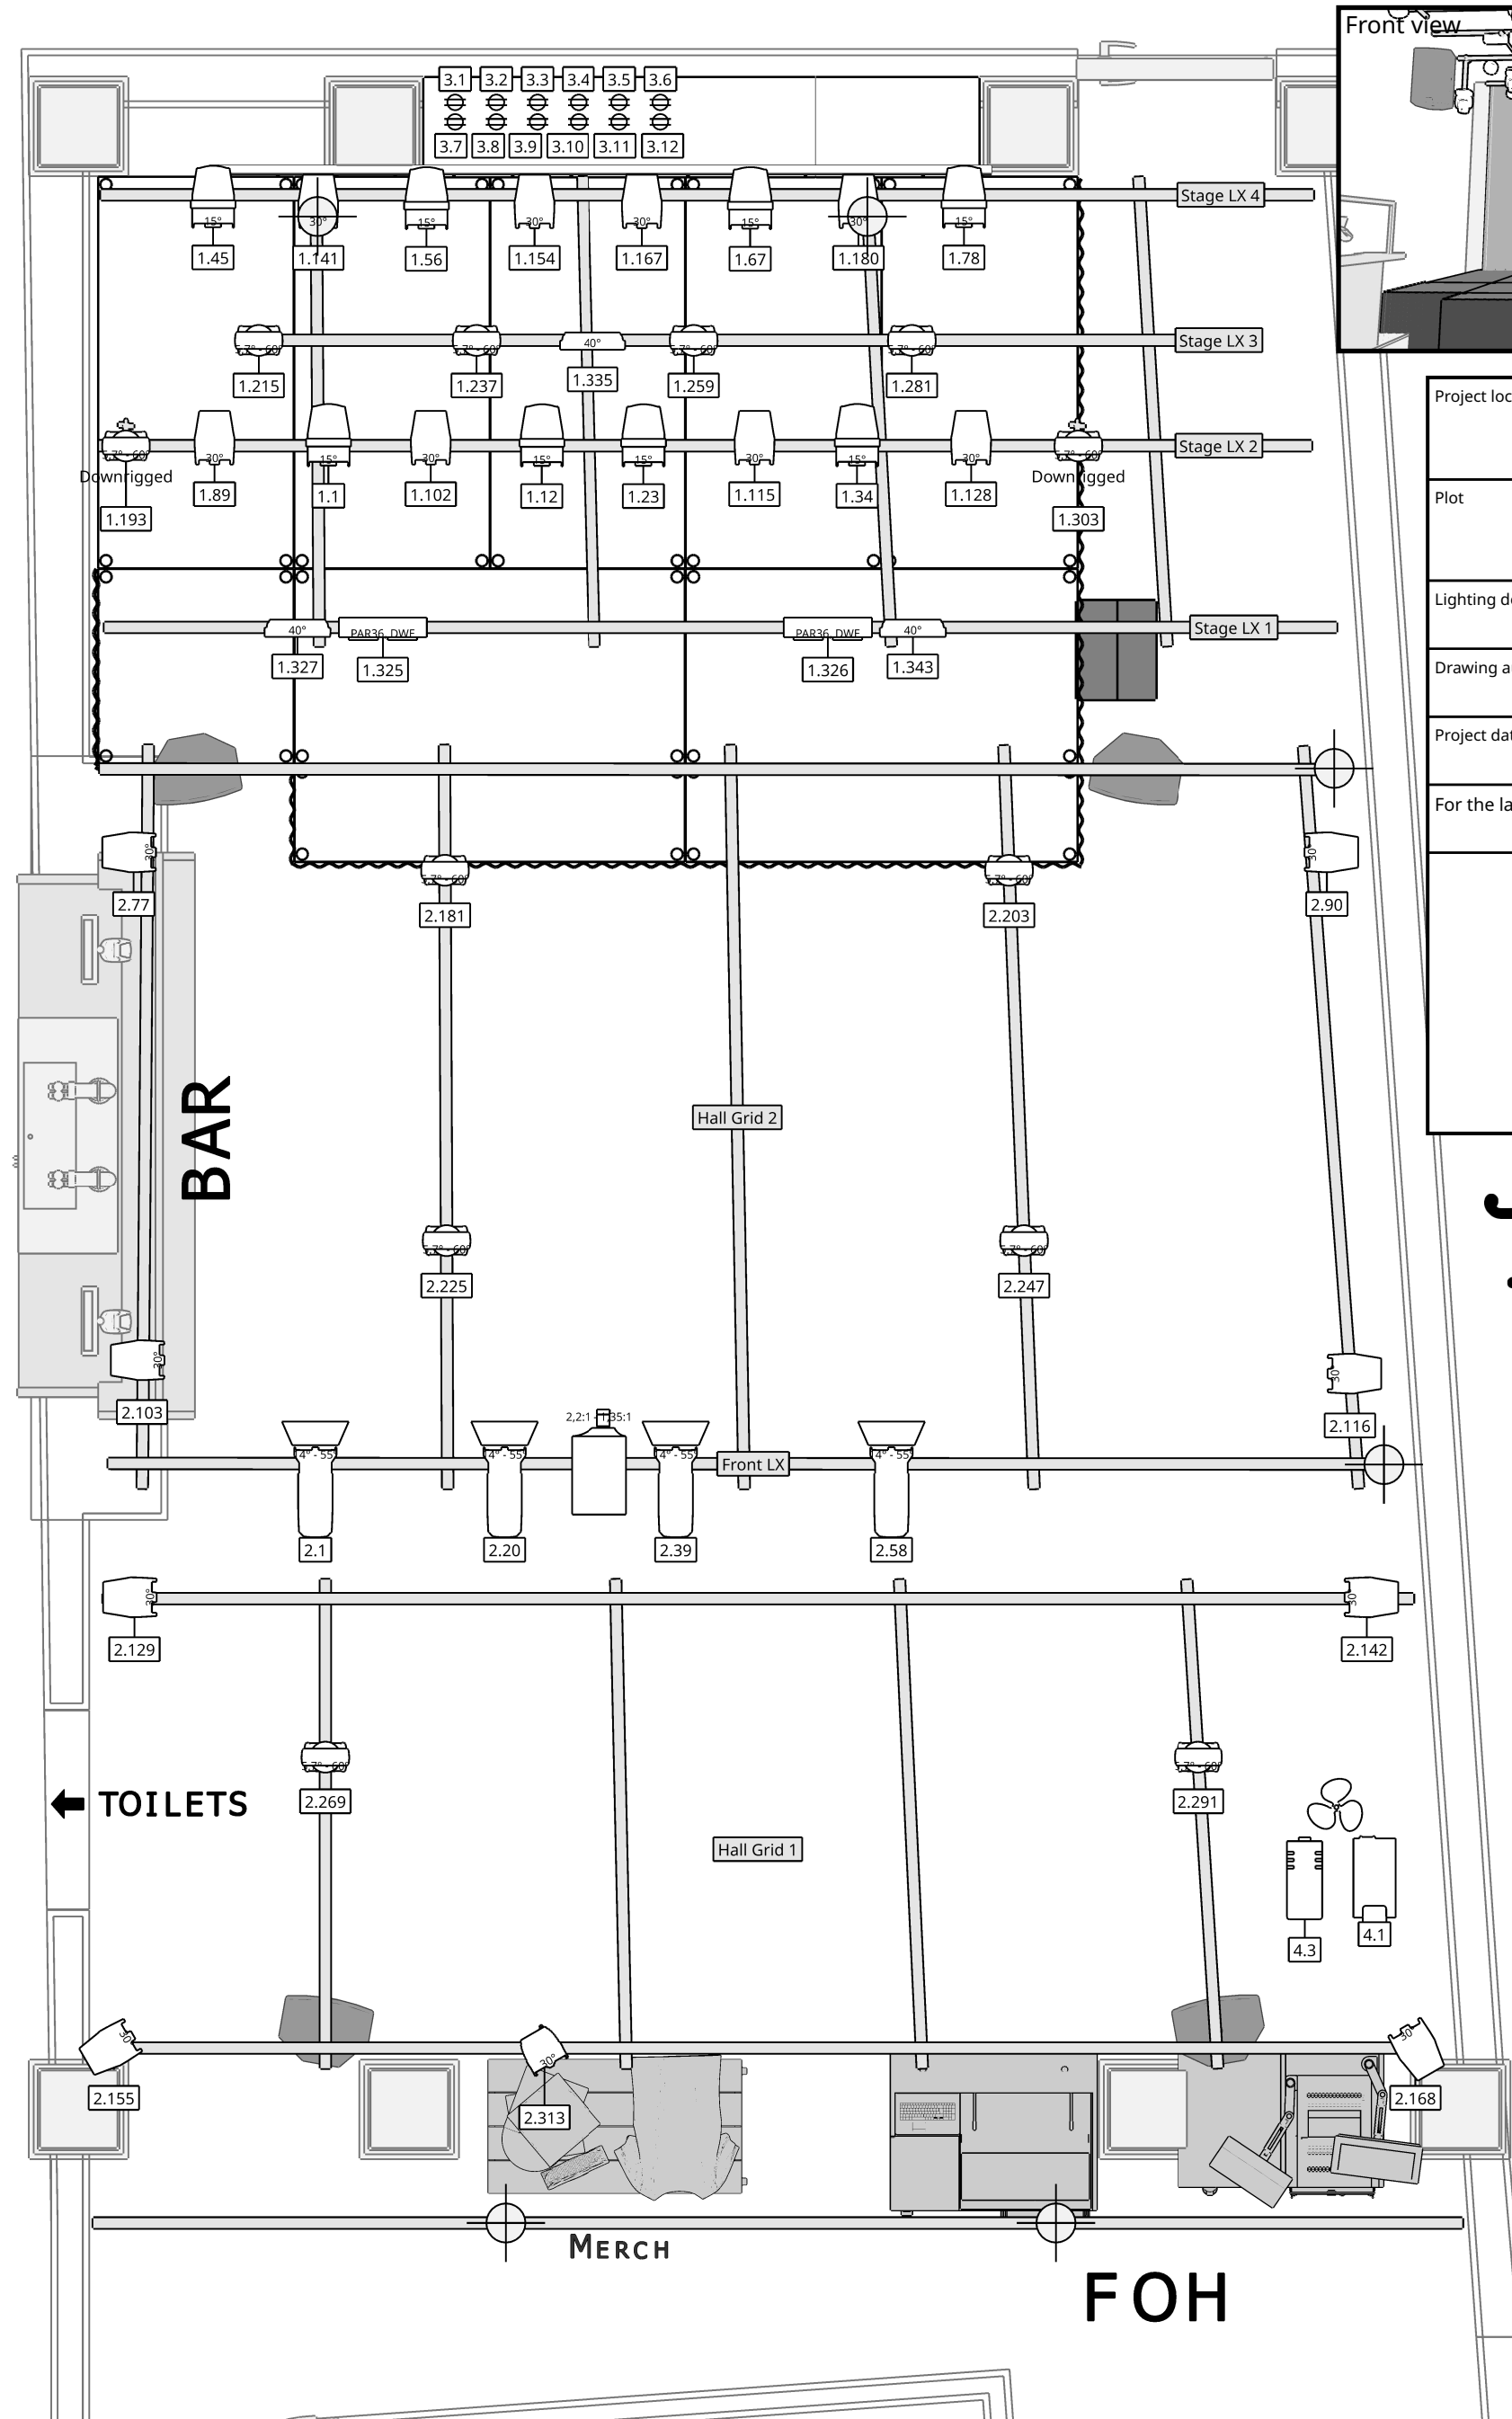

Project location	Project
Luxor Live	Small Hall
Plot	Plot: All Fixtures
Lighting designer	Sanders, Wolterink & Van Der Meijde
Drawing author	Fon Sanders
Project date	Drawing version
2026	V3
For the latest version see: www.luxorlive.nl/tech-specs/lights	

LUXOR LIVE

Symbol Key

- | | | | |
|--|---|---------------------------------|--------------------------------|
| CLF Hera (16)
☑ 13 Chs | Showtec Ignitor-6 Section Strobe (3)
☑ 8 Chs | Jem ZR25 Smoke Machine | Epson EB-L530U Video Projector |
| CLF Yara (8)
☑ 11 Chs | 2-Lite Blinder (2) | Look Solutions Unique 2.1 Hazer | Merch Light
☑ 11 Chs |
| Robe Robin LEDBeam 150 (12)
☑ 1 - Standard 16-Bit Mode (22 Chs) | Briteq BT-Theatre HD1 (4)
☑ TR16 Mode (19 Chs) | Fan | ADB Memopack Dimmer (12) |



Small Hall DMX Patch (Sorted)

2026 Luxor Live

DMX Universe, 1

Patch	Name	Mode	DMX Footprint	Optics	Location	Note	Accessories
1.1	CLF Yara	11 Channel	11	15°	Stage LX 2		
1.12	CLF Yara	11 Channel	11	15°	Stage LX 2		
1.23	CLF Yara	11 Channel	11	15°	Stage LX 2		
1.34	CLF Yara	11 Channel	11	15°	Stage LX 2		
1.45	CLF Yara	11 Channel	11	15°	Stage LX 4		
1.56	CLF Yara	11 Channel	11	15°	Stage LX 4		
1.67	CLF Yara	11 Channel	11	15°	Stage LX 4		
1.78	CLF Yara	11 Channel	11	15°	Stage LX 4		
1.89	CLF Hera	13 Channel	13	30°	Stage LX 2		
1.102	CLF Hera	13 Channel	13	30°	Stage LX 2		
1.115	CLF Hera	13 Channel	13	30°	Stage LX 2		
1.128	CLF Hera	13 Channel	13	30°	Stage LX 2		
1.141	CLF Hera	13 Channel	13	30°	Stage LX 4		
1.154	CLF Hera	13 Channel	13	30°	Stage LX 4		
1.167	CLF Hera	13 Channel	13	30°	Stage LX 4		
1.180	CLF Hera	13 Channel	13	30°	Stage LX 4		
1.193	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 2	Downrigged	
1.215	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 3		
1.237	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 3		
1.259	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 3		
1.281	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 3		
1.303	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Stage LX 2	Downrigged	
1.325	Showtec Stage Blinder 2 DMX	Control	1	PAR36, DWE	Stage LX 1		
1.326	Showtec Stage Blinder 2 DMX	Control	1	PAR36, DWE	Stage LX 1		
1.327	Showtec Ignitor-6 Section	8 Channel Mode	8	40°	Stage LX 1		
1.335	Showtec Ignitor-6 Section	8 Channel Mode	8	40°	Stage LX 3		
1.343	Showtec Ignitor-6 Section	8 Channel Mode	8	40°	Stage LX 1		

DMX Universe, 2

Patch	Name	Mode	DMX Footprint	Optics	Location	Note	Accessories
2.1	Briteq BT-Theatre HD1	TR16	19	14° - 55°	Front LX		Barndoors
2.20	Briteq BT-Theatre HD1	TR16	19	14° - 55°	Front LX		Barndoors
2.39	Briteq BT-Theatre HD1	TR16	19	14° - 55°	Front LX		Barndoors
2.58	Briteq BT-Theatre HD1	TR16	19	14° - 55°	Front LX		Barndoors
2.77	CLF Hera	13 Channel	13	30°	Hall Grid 2		
2.90	CLF Hera	13 Channel	13	30°	Hall Grid 2		
2.103	CLF Hera	13 Channel	13	30°	Hall Grid 2		
2.116	CLF Hera	13 Channel	13	30°	Hall Grid 2		
2.129	CLF Hera	13 Channel	13	30°	Hall Grid 1		
2.142	CLF Hera	13 Channel	13	30°	Hall Grid 1		
2.155	CLF Hera	13 Channel	13	30°	Hall Grid 1		
2.168	CLF Hera	13 Channel	13	30°	Hall Grid 1		
2.181	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 2		
2.203	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 2		
2.225	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 2		
2.247	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 2		
2.269	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 1		
2.291	Robe Robin LEDBeam 150 RGBW	1 - Standard 16-Bit [Colour Mixing Mode=RGBW]	22	5,7° - 60°	Hall Grid 1		
2.313	GLG Creator 1 RGBWA Ledlamp	Mode 3	11	30°	Merch		

DMX Universe, 3

Patch	Name	Mode	DMX Footprint	Optics	Location	Note	Accessories
3.1	ADB Dimmer	12			Stage Floor		

DMX Universe, 4

Patch	Name	Mode	DMX Footprint	Optics	Location	Note	Accessories
4.1	Look Solutions Unique 2.1	Standard	2		Floor at FOH		
4.3	JEM ZR25	Standard	1		Floor at FOH		